




$\varnothing 3 \pm 0.1$

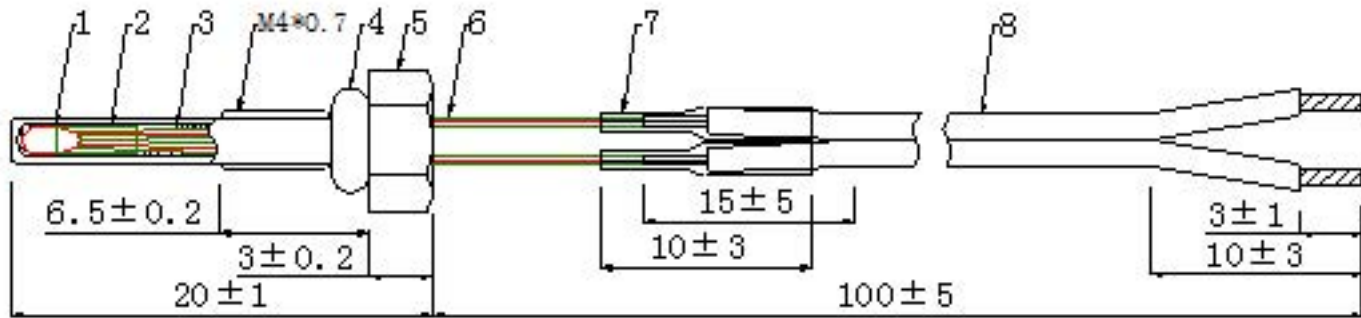

No.	Material	Material Specification
1	Resistance Value	R25=10K Ω \pm 1% B(25/50)=3950K \pm 1%
2	Casing	ϕ 1 teflon heat shrinkable tube transparent
3	Ring	ϕ 7* ϕ 3*2 white
4	Shell	ϕ 3*20+M4*0.7+S6 brass
5	Casing	teflon casing transparent
6	Casing	ϕ 1.0 regular heat shrinkable tube black 150 $^{\circ}$ C
7	Lead wire	UL4413 # 28AWG black